

SPECIALTY PRODUCTS

WDPL Series

Drip Pan Elbow

Watson McDaniel reserves the right to change the designs and/or materials of its products without notice.
©2002 Watson McDaniel Company

Revised 7/2002

Model	WDPL
Sizes	3/4" through 8"
Connections	FNPT, Flanged
Body Material	Cast Iron
PMO Max. Operating Pressure	250 PSIG
TMO Max. Operating Temperature	406°F
PMA Max. Allowable Pressure	250 PSIG @ 406°F



TYPICAL APPLICATION

The **WDPL** Drip Pan Elbow is used to collect and remove condensate. Typically used with steam boilers, pressure relief valves, safety valves and steam pressure vessels and lines.

FEATURES

- Collects discharge condensate from steam systems
- Returns condensate to safe areas
- Increases life of safety valves
- Reduces discharge piping strain
- Female NPT or flange connections available

SAMPLE SPECIFICATION


Drip Pan Elbow shall be made of cast iron and conform to the Power Piping Code. It shall have a pan to collect condensate in the steam riser pipe and a drain to pipe away the condensate.

HOW TO ORDER

Specify pipe size needed for application.

MATERIALS

Body	Cast Iron
------	-----------

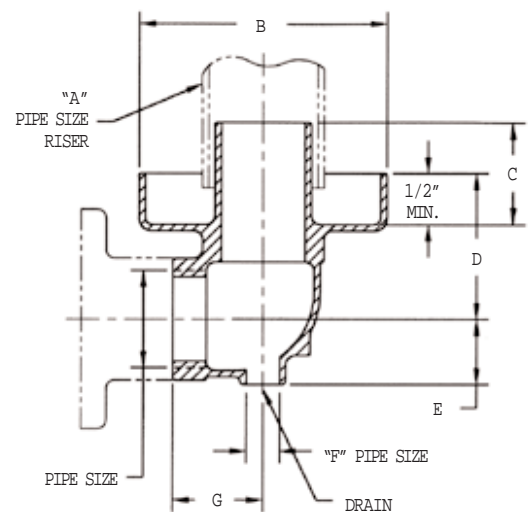

DIMENSIONS – inches / pounds

Size	Connection	A	B	C	D	E	F	G	Weight (lbs)
3/4"	FNPT	1-1/2	3-3/4	1-3/4	2-3/4	1-1/32	1/4	1-1/2	2
1"	FNPT	1-1/2	3-3/4	1-3/4	2-3/4	1-1/32	1/4	1-1/2	2
1-1/4"	FNPT	2	5-1/2	2-15/32	4-1/8	1-7/16	3/8	2-1/8	5
1-1/2"	FNPT	2	5-1/2	2-15/32	4-1/8	1-7/16	3/8	2-1/8	5
2"	FNPT	3	6-1/4	2-3/8	3-5/8	1-5/8	1/2	2-1/4	6.5
2-1/2"	FNPT	4	7-3/8	3	4-5/16	1-15/16	3/4	2-11/16	11
3"	FNPT	4	8	3-1/2	4-7/8	2-5/16	3/4	3-1/8	14
4"	FNPT	6	9-5/8	4-1/2	5-3/4	2-7/8	3/4	3-3/4	27
6"	125 Flg	8	12-3/4	6-5/8	7-9/16	4-3/16	3/4	8	75
8"	125 Flg	10	16-1/2	7-1/2	8-9/16	5-3/8	1	10-3/4	102